


SVS CEILING LIFTS

Provides longest lowering distance

SVS 12EX Series

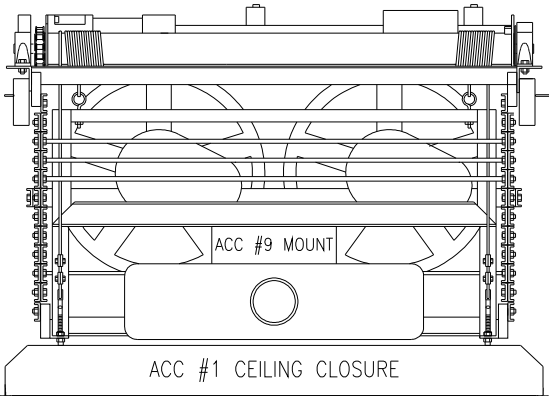

PRODUCT FEATURES

- Provides "longest lowering distance" for all projectors
- Lowering distances from 24'9" to 33'8" [7.5 m to 10.3 m]
- Supports projectors up to 32" Wide [812.8 mm] -width must include video cable connections if on the side of projector
- Lifting capacity up to 700 lbs [317.52 kg]
- Three positions: Stored, Show (adjustable) & Service
- Includes 24VAC wall plate controller for low voltage control & two Accessory #7 video cable retractors
- Very quiet operation
- Warranty: 5 Year parts, 1 year motor & 90 day factory labor

SPECIFICATIONS

LIFT MODEL	MAXIMUM LOWERING DISTANCE	VERTICAL HEIGHT OF LIFT IN CLOSED POSITION (1) (CEILING CLOSURE & PROJECTOR NOT INCLUDED)	PHYSICAL DIMENSIONS		NET WEIGHT	ESTIMATED SHIPPING WEIGHT
			WIDTH	DEPTH		
12EX-24	24'9" /7.6m	28.5" /724mm	44.0" /1118mm	47.5" /1207mm	410 lbs/ 185.9 kg	520 lbs/ 235.8 kg
12EX-29	29'3" /8.9m	31.5" /800mm			450 lbs/ 204.1 kg	530 lbs/ 240.4 kg
12EX-33	33'8" /10.3m	34.5" /876mm			470 lbs/ 213.1 kg	610 lbs/ 276.6 kg

(1) Vertical height may vary depending on height of projector. Supporting structure is additional

STANDARD SPECIFICATIONS

Voltage 110v/220V, 60/50hz
Current Draw 1.5 amps [110v], .75 amps [220v]
Control Voltage 24 VAC (contact closure)
Materials Steel/Aluminum/Nylon


RECOMMENDED ACCESSORIES

#1 Ceiling Closure - Self-aligning closure system complete with ceiling framework. Supplied with 15/16" ceiling trim ring. Designed to accept ceiling tile or dry wall ceiling. Supplied unpainted.

FP1 Ceiling Closure -Fixed mounted flat closure panel- Lipped or Lipless. Supplied with 15/16" ceiling trim ring. Ceiling material attaches to the bottom of the panel or closure can be painted. Supplied unpainted.

#2 Plenum Shroud - Protective Metal cover for lift & projector in air plenum rated ceiling.

#9 Mount - Mounting bracket used to attach the projector to the saddle of the lift in an inverted position (model varies with the projector model).

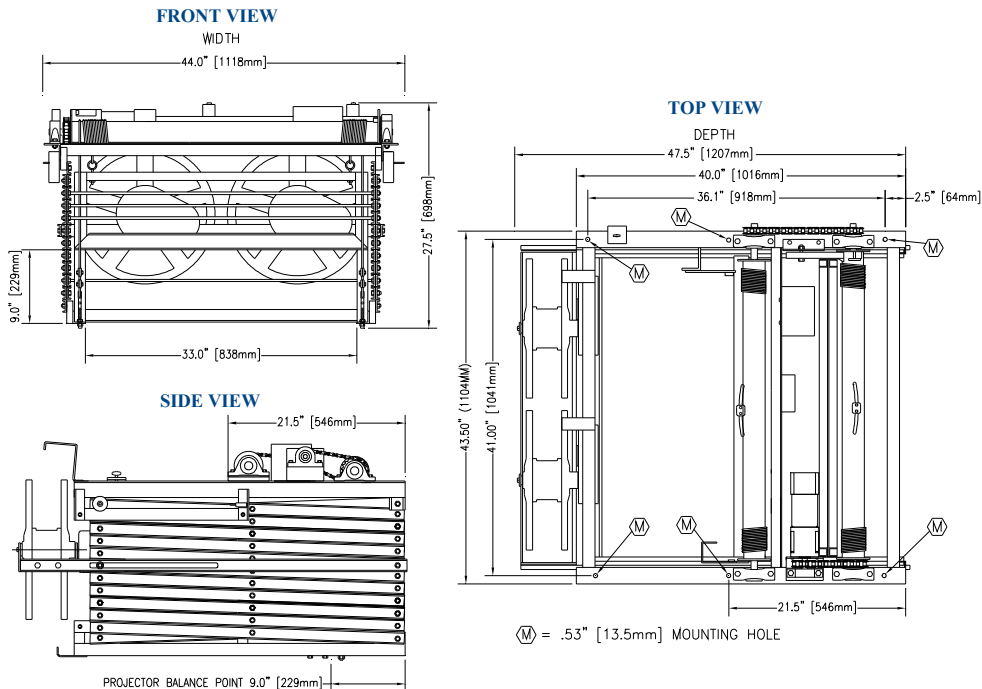

U.S. Patent No. 5,261, 645 & 5, 366,203

Eastern Sales/ Main Office
 Tel: 850-522-4747
 Fax: 850-522-4739

Western Sales Office
 Tel: 720-283-6410
 Fax: 720-283-6424

International Sales Office
 Tel: 001-720-283-6410
 Fax: 001-720-283-6424

www.svslifts.com
 sales@svslifts.com