


SVS MINI 7 & MINI 7EX SERIES PROJECTOR LIFT WORKSHEET

(USED TO DETERMINE APPROXIMATE CEILING SPACE REQUIREMENTS)

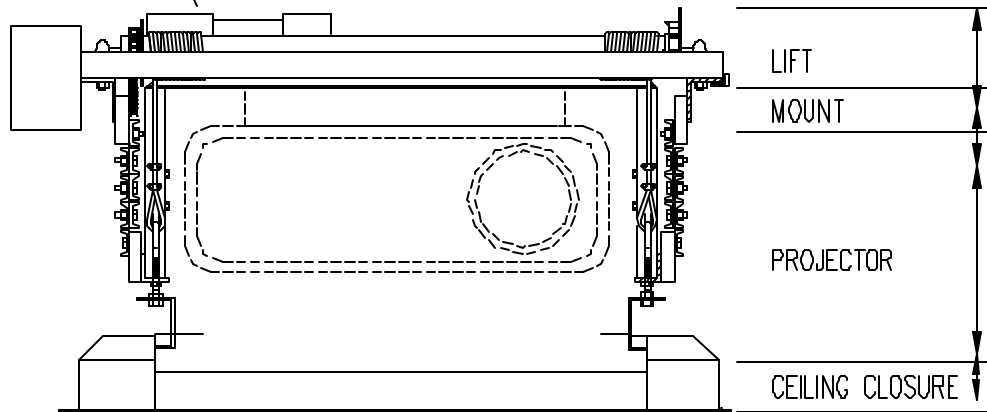

LIFT HEIGHT	
MINI 7-4: } MINI 7EX-4 }	16.00 INCHES [406mm]
MINI 7-6: } MINI 7EX-6 }	17.50 INCHES [445mm]
MINI 7-7: } MINI 7EX-7 }	19.00 INCHES [483mm]

COLUMN A

SVS LIFT ABOVE MOUNT HEIGHT

ADD SVS #9 MOUNT HEIGHT CAN RANGE FROM 2 TO 4.5 INCHES. 3.5 INCHES IS STANDARD.

ADD PROJECTOR/MONITOR HEIGHT OVERALL HEIGHT OF PROJECTOR OR MONITOR BELOW #9 MOUNT.

TOTAL HEIGHT OF LIFT, MOUNT, & PROJECTOR/MONITOR = ← CONTINUE WITH HIGHEST NUMBER. IF EQUAL CONTINUE WITH COLUMN B. →

ADD SVS #1 CEILING CLOSURE, HEIGHT IS 1.5 TO 5 INCHES. 4 INCHES IS STANDARD.

ADD 2 INCHES IF PLENUM SHROUD IS USED.

TOTAL HEIGHT = ← CEILING SPACE CLEARANCE →

COLUMN B

LIFT HEIGHT (SEE CHART ABOVE)

ADD SVS #1 CEILING CLOSURE HEIGHT

ADD 2 INCHES IF PLENUM SHROUD IS USED.

TOTAL HEIGHT

- * ALL DIMENSION ARE IN INCHES, UNLESS OTHERWISE INDICATED
- * SPECIFICATIONS & ILLUSTRATIONS ARE BASED ON INFORMATION AT TIME OF PRINTING.
- * THE RIGHT IS RESERVED TO MAKE CHANGES IN SPECIFICATIONS, MATERIALS, MODELS, AND APPEARANCE OR TO DISCONTINUE MODELS AT ANY TIME WITHOUT NOTICE.
- * IF YOU HAVE ANY QUESTION OR NEED MORE INFORMATION PLEASE CONTACT SVS AT 850-522-4747 OR SALES@SVSLIFTS.COM

TOTAL HEIGHT DOES NOT INCLUDE SUPPORT STRUCTURE FOR LIFT. (UNISTRUT, ANGLE IRON, THREADED ROD, ETC.)

US PATENT # 5,261,645 & # 5,366,203