

**LIMIT SWITCH OPERATION:**


NO = NORMALLY OPEN SWITCH TERMINAL, CONNECTS TO COMMON TERMINAL WHEN SWITCH LEVER IS DEPRESSED

NC = NORMALLY CLOSED SWITCH TERMINAL, CONNECTS TO THE COMMON TERMINAL UNTIL THE SWITCH LEVER IS DEPRESSED.

# SVS STANDARD WIRING

(FOR SVS 4, SVS MINI 7, SVS MINI 7EX, SVS 7, SVS 7EX, SVS 7HSE, SVS 12EX, AND SVS 12HSE SERIES LIFTS)

[NOT TO BE USED WITH LIFT WITH POWER SENSOR, 12V TRIGGER, OR EXTRA SHOW POSITION ACCESSORIES]

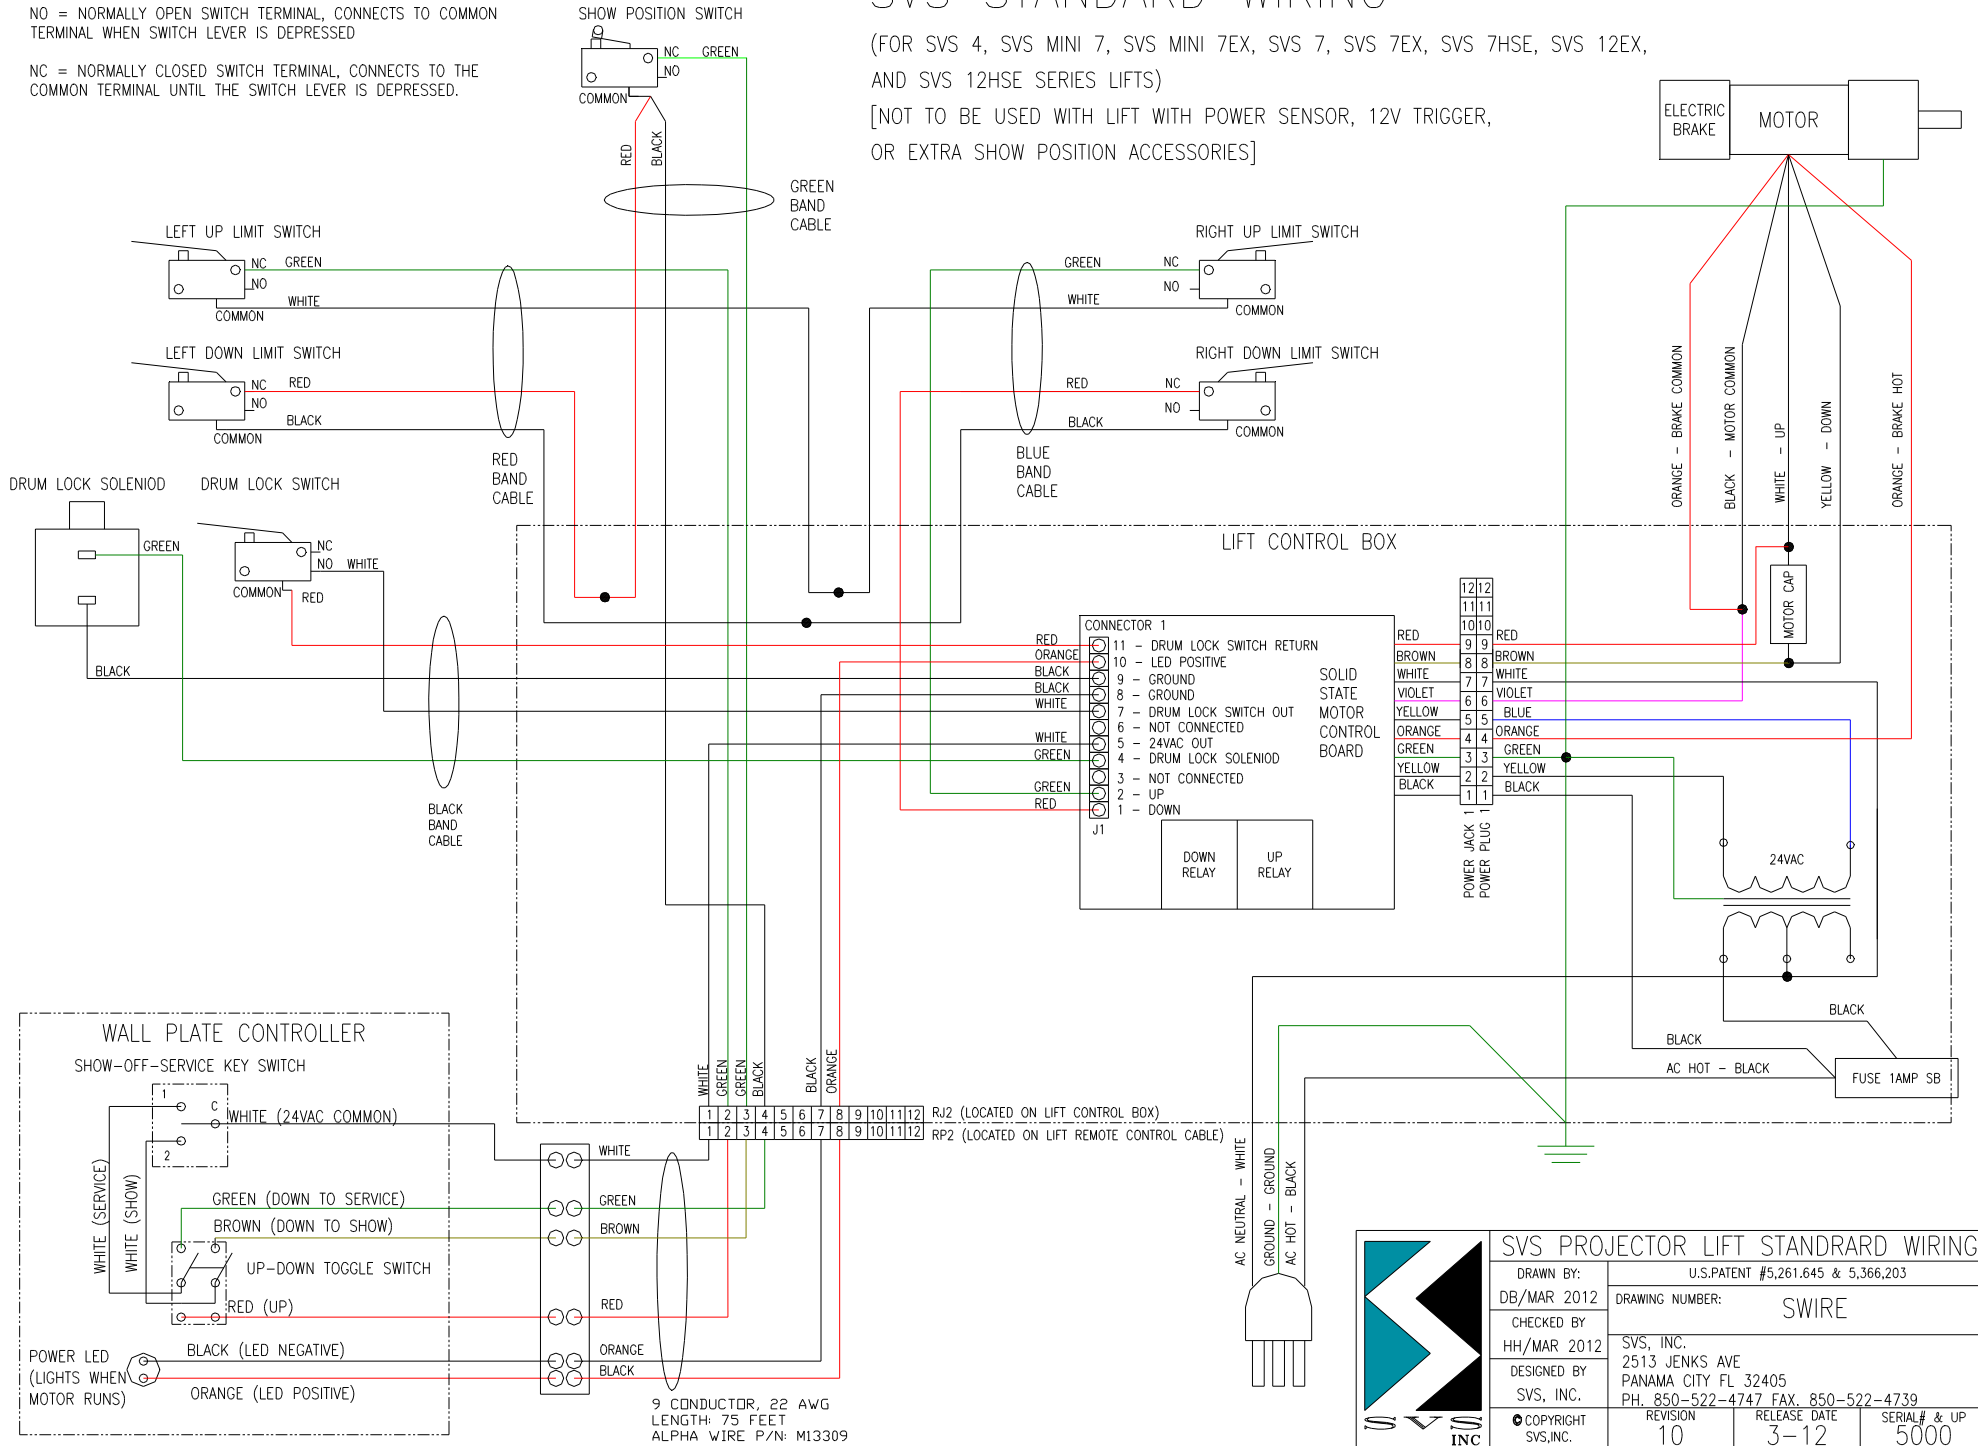

9 CONDUCTOR, 22 AWG  
LENGTH: 75 FEET  
ALPHA WIRE P/N: M13309



SVS PROJECTOR LIFT STANDRAD WIRING		
DRAWN BY: DB/MAR 2012	U.S.PATENT #5,261,645 & 5,366,203	
CHECKED BY HH/MAR 2012	DRAWING NUMBER: SWIRE	
DESIGNED BY SVS, INC.	SVS, INC. 2513 JENKS AVE PANAMA CITY FL 32405 PH. 850-522-4747 FAX. 850-522-4739	
© COPYRIGHT SVS, INC.	REVISION 10	RELEASE DATE 3-12
		SERIAL# & UP 5000